


FREE WALL

SNAP-ON SYSTEM, COMBINATION OF PLANE 78 AND PLANE 170

Page 01-07

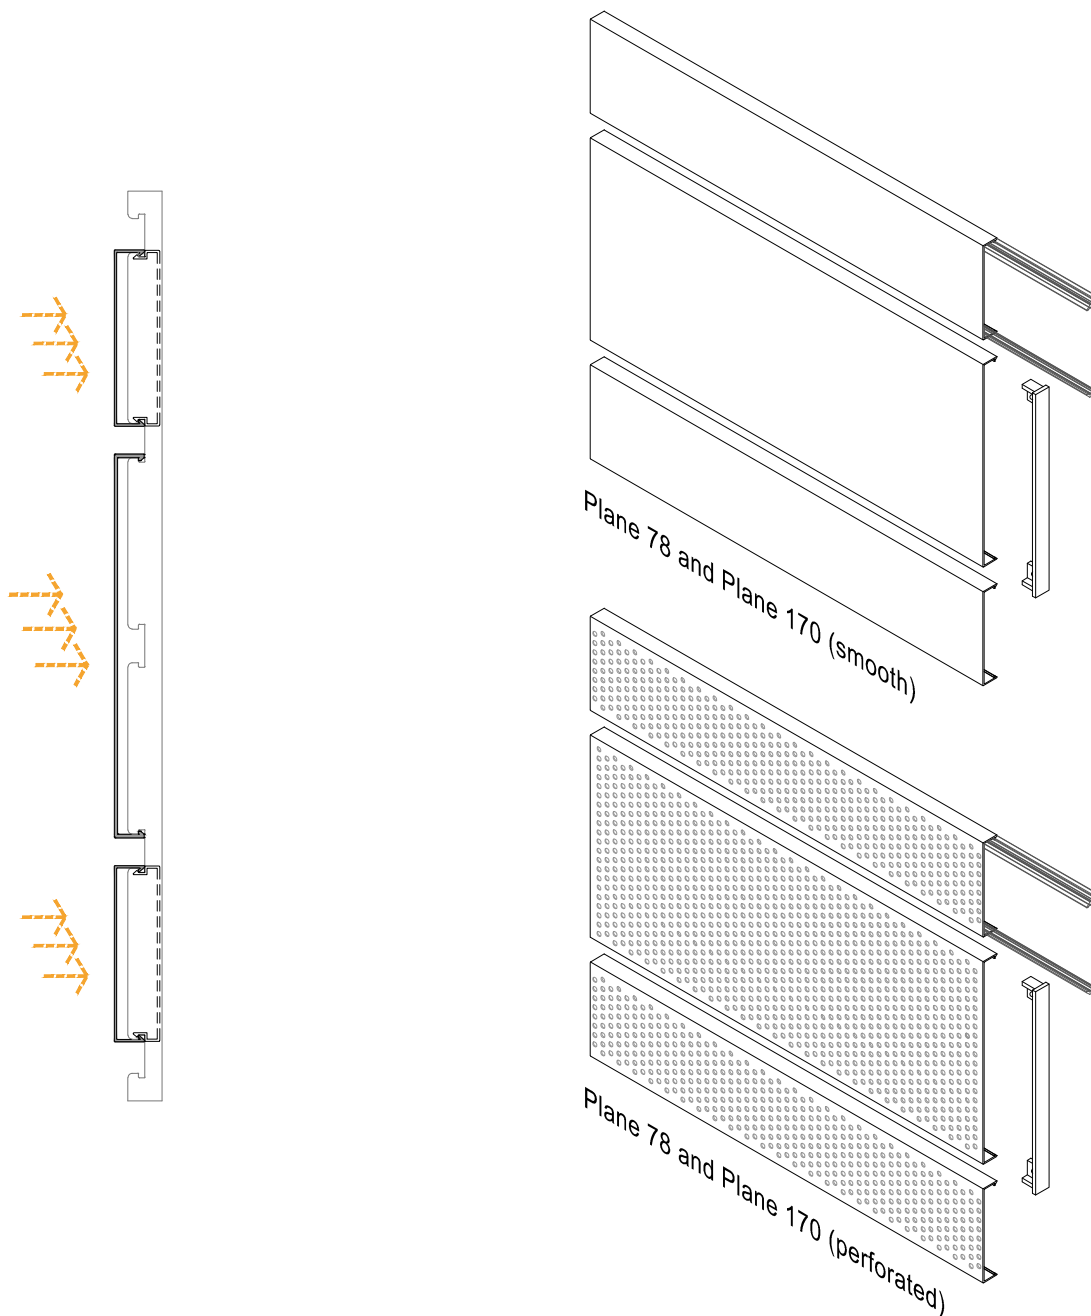

Technical department fácilfaçades®

Specification workshop

Project:

Location:

Authorization:

Revision:

Revision:

Date: September 2020


Dimensions: mm. (in.)



FREE WALL

DETAIL PLANE 78 AND PLANE 170 COMBINED

Page 02-07

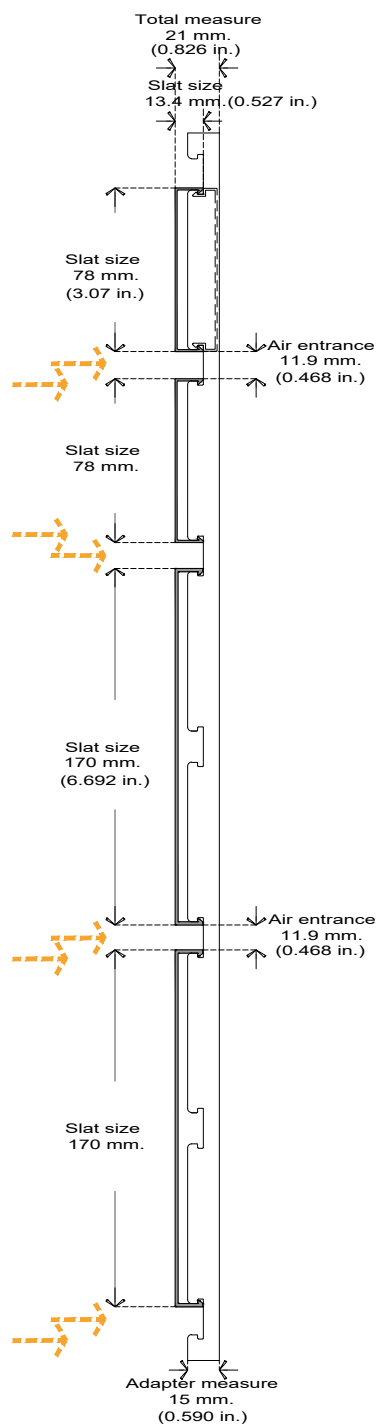

Technical department fácilfaçades®

Specification workshop

Project:

Location:

Authorization:

Revision:

Revision:

Date: September 2020


Dimensions: mm. (in.)



FREE WALL

SELECTION OF SUPPORTS ACCORDING TO THE SEPARATION BETWEEN ANCHORS
COMBINATION OF PLANE 78 AND PLANE 170

Page 03-07

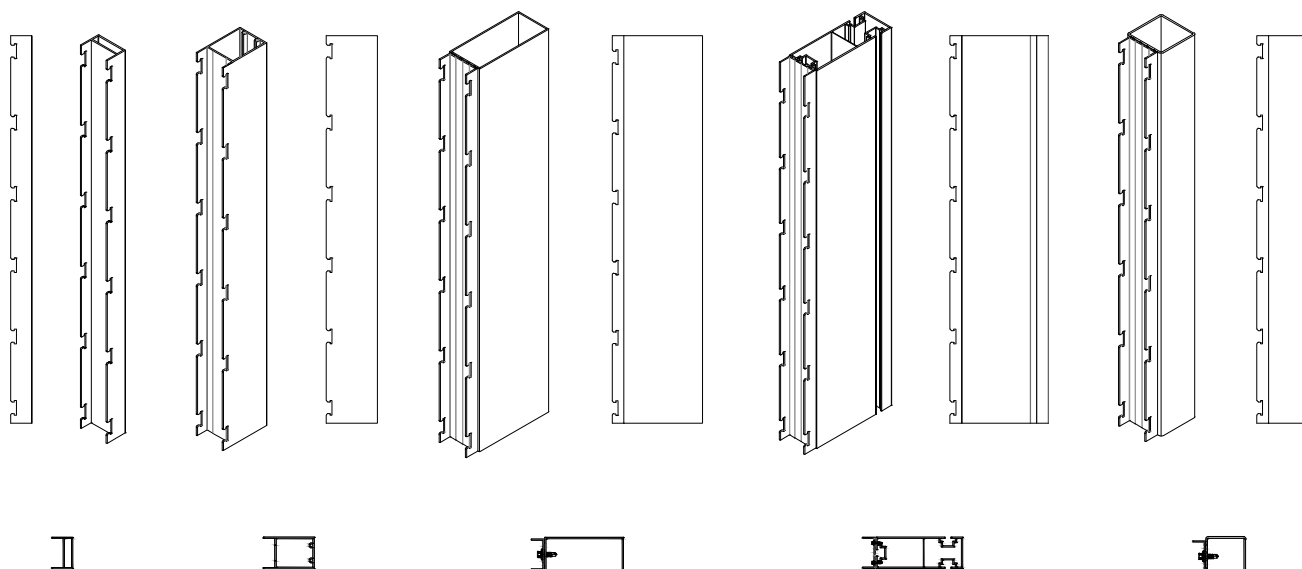



- Option **A** Die cut E1 Option **B** Die cut E1 Option **C** Die cut E1 Option **D** Die cut E1 Option **E** Die cut E1

Distances for installation of structural supports

Nm	Structural support options	Maximum distance (DA)	Maximum distance (DV)
A	Basic RM profile, wall covering	1300 mm. (51.18 in.)	1000 mm. (39.37 in.)
B	(T) support with die cut area 65X40 (2.55x1.57 in.)	2200 mm. (86.61 in.)	1000 mm.
C	Basic support with adapter profile 100X44 (3.93x1.73 in.)	3300 mm. (129.92 in.)	1000 mm.
D	Basic facade support with adapter profile 110X40 (4.33x1.57 in.)	4000 mm. (157.48 in.)	1000 mm.
E	Adapter profile anchored to construction site	>4000 mm. (157.48 in.)	1000 mm.

- 1 Aluminium L bracket 4 x 4 x 1/4"
- 2 Aluminium L bracket 2 X 4 x 1/4"
- 3 Aluminium L bracket 2 X 2 x 1/4"

- Nm Structural support options
- DA Maximum distance between anchors of brackets
- DV Maximum distance between structural supports
- VV Maximum vertical cantilever (support) 500 mm. (19.65 in.)
- VH Maximum horizontal cantilever (slat) 200 mm. (7.87 in.)

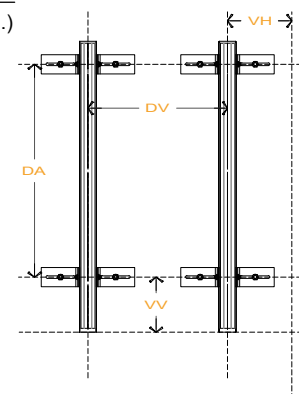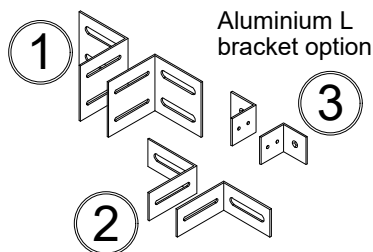

Technical department fácilfaçades®
Specification workshop

Revision:
Revision:

Project:
Location:
Authorization:


Date: September 2020
Dimensions: mm. (in.)



FREE WALL

ANCHORING TO SLABS WITH STRUCTURAL SUPPORT 100 X 44 mm. (3.93X1.73 in.)
COMBINATION OF PLANE 78 AND PLANE 170 (PERFORATED AND SMOOTH)

Page 04-07

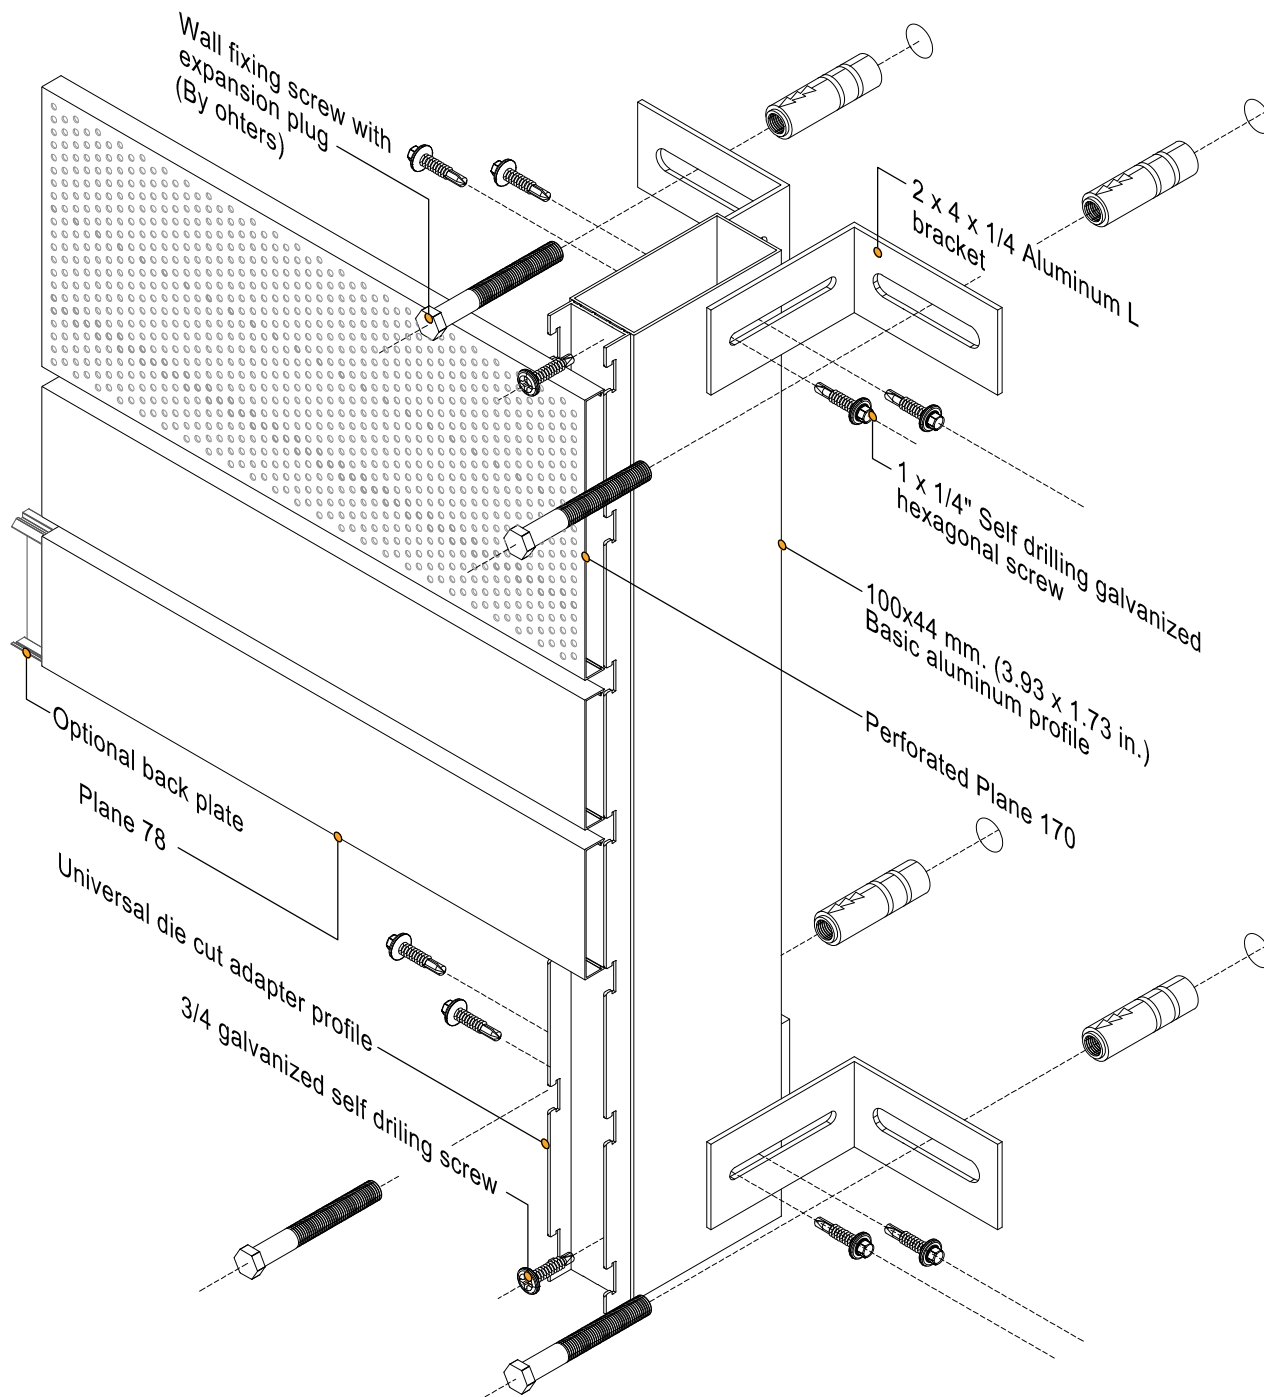

Technical department fácilfaçades®
Specification workshop

Revision:
Revision:

Project:
Location:
Authorization:

Date: September 2020
Dimensions: mm. (in.)




FREE WALL

ANCHORAGE TO SUB STRUCTURE WITH STRUCTURAL SUPPORT

Page 05-07

(T) 65 X 40 mm. (2.55 X 1.57 in.) COMBINATION OF PLANE 78 AND PLANE 170 (PERFORATED AND SMOOTH)

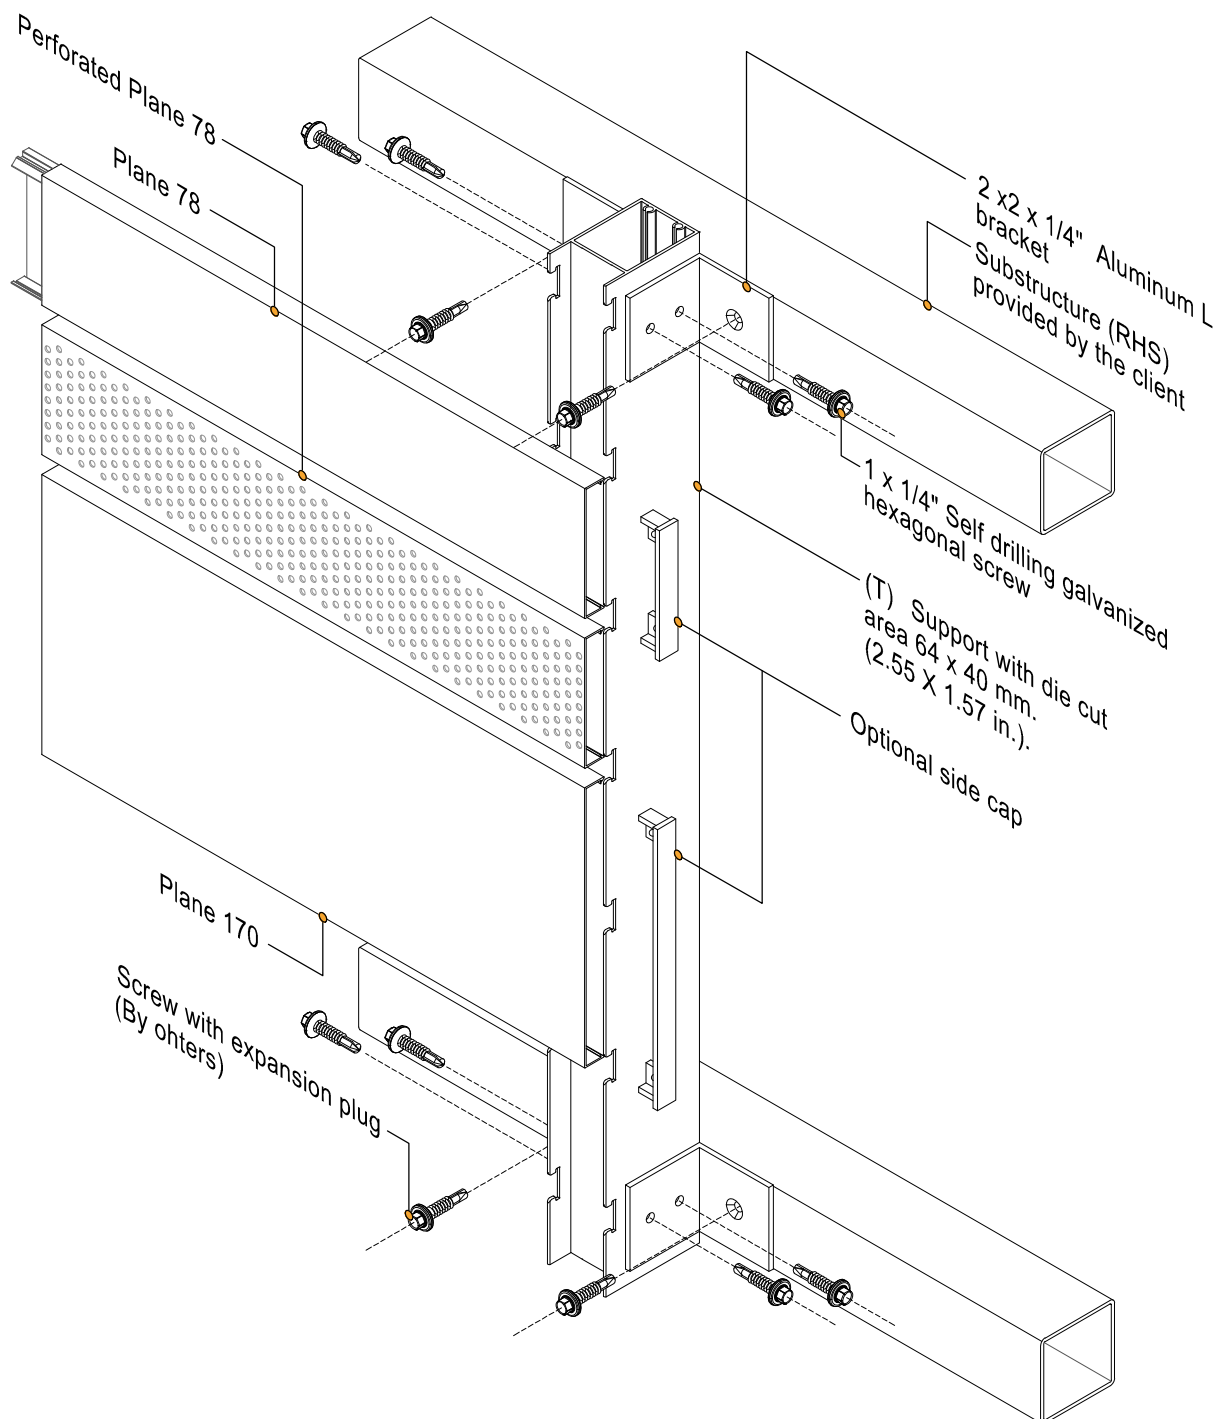

Technical department fácilfaçades®
Specification workshop

Project:
Location:
Authorization:

Revision:
Revision:


Date: September 2020
Dimensions: mm. (in.)

fácil
façades

FREE WALL

ACHORING TO SLABS WITH STRUCTURAL SUPPORT 110 X 40 mm. (4.33X1.57 in.)
COMBINATION OF PLANE 78 AND PLANE 170 (PERFORATED AND SMOOTH)

Page 06-07

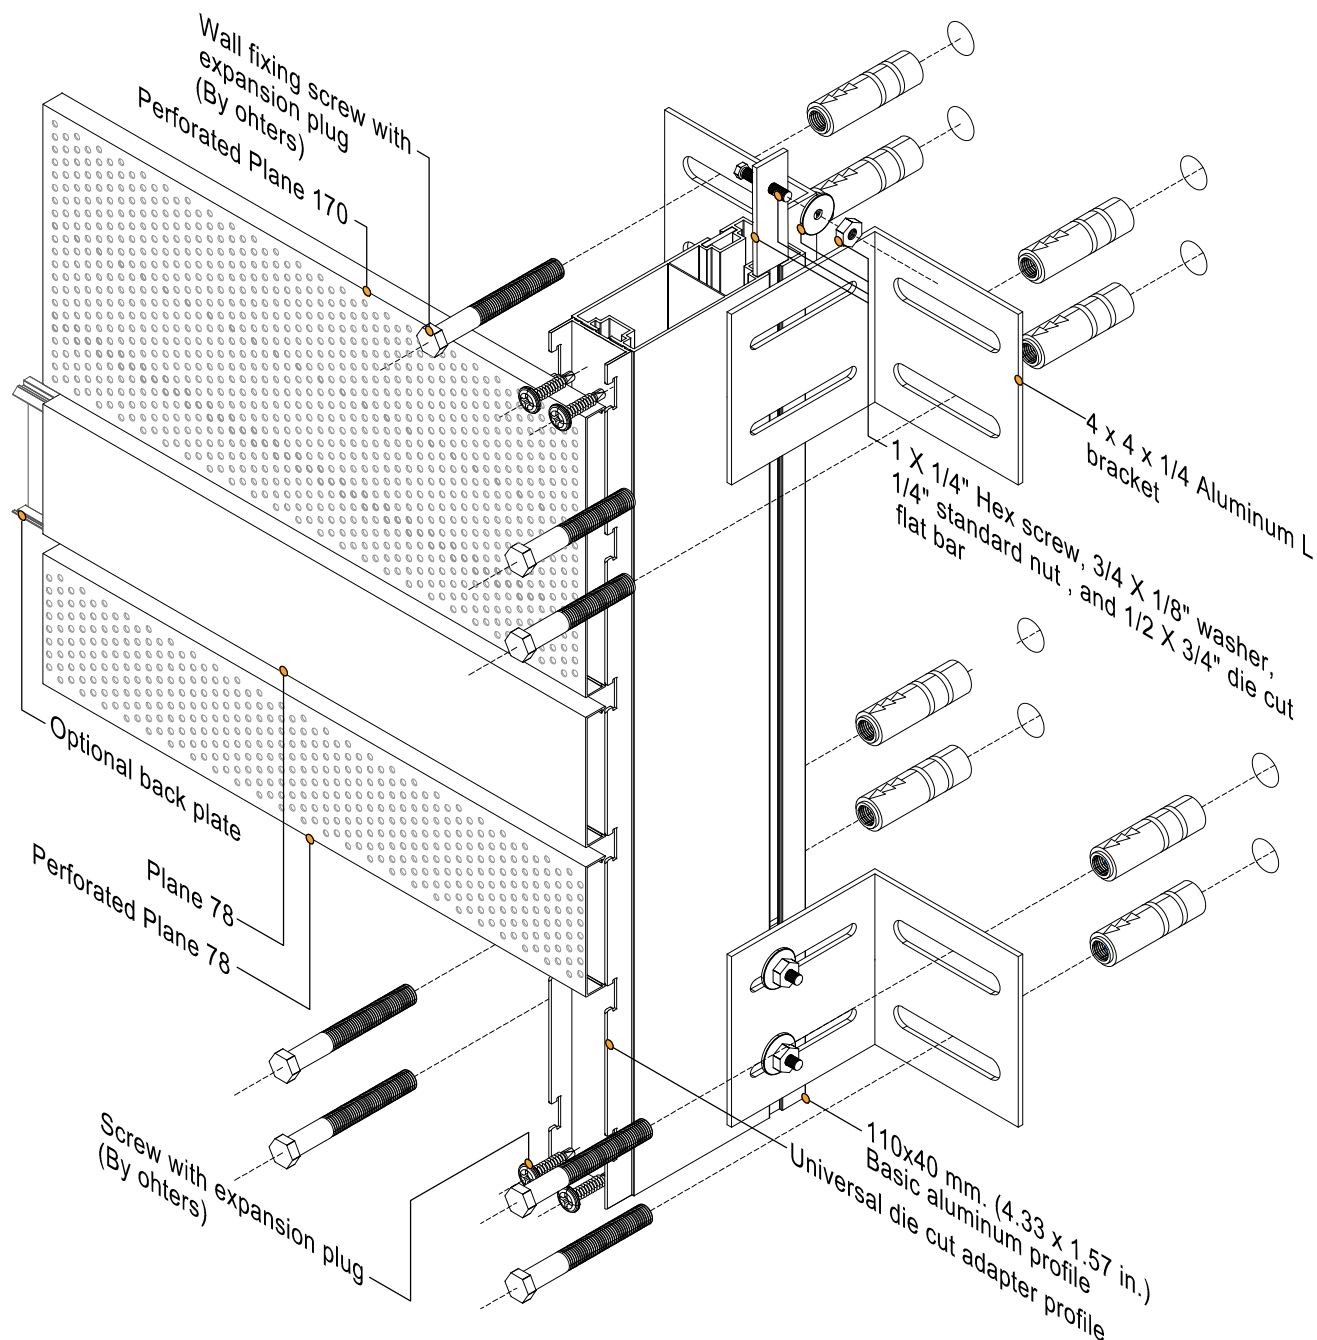

Technical department fácilfaçades®
Specification workshop

Project:
Location:
Authorization:


Revision:
Revision:
Date: September 2020
Dimensions: mm. (in.)



FREE WALL

VENTILATED FACADE PROPOSAL, COMBINATION OF PLANE 78 AND PLANE 170
(PERFORATED AND SMOOTH)

Page 07-07

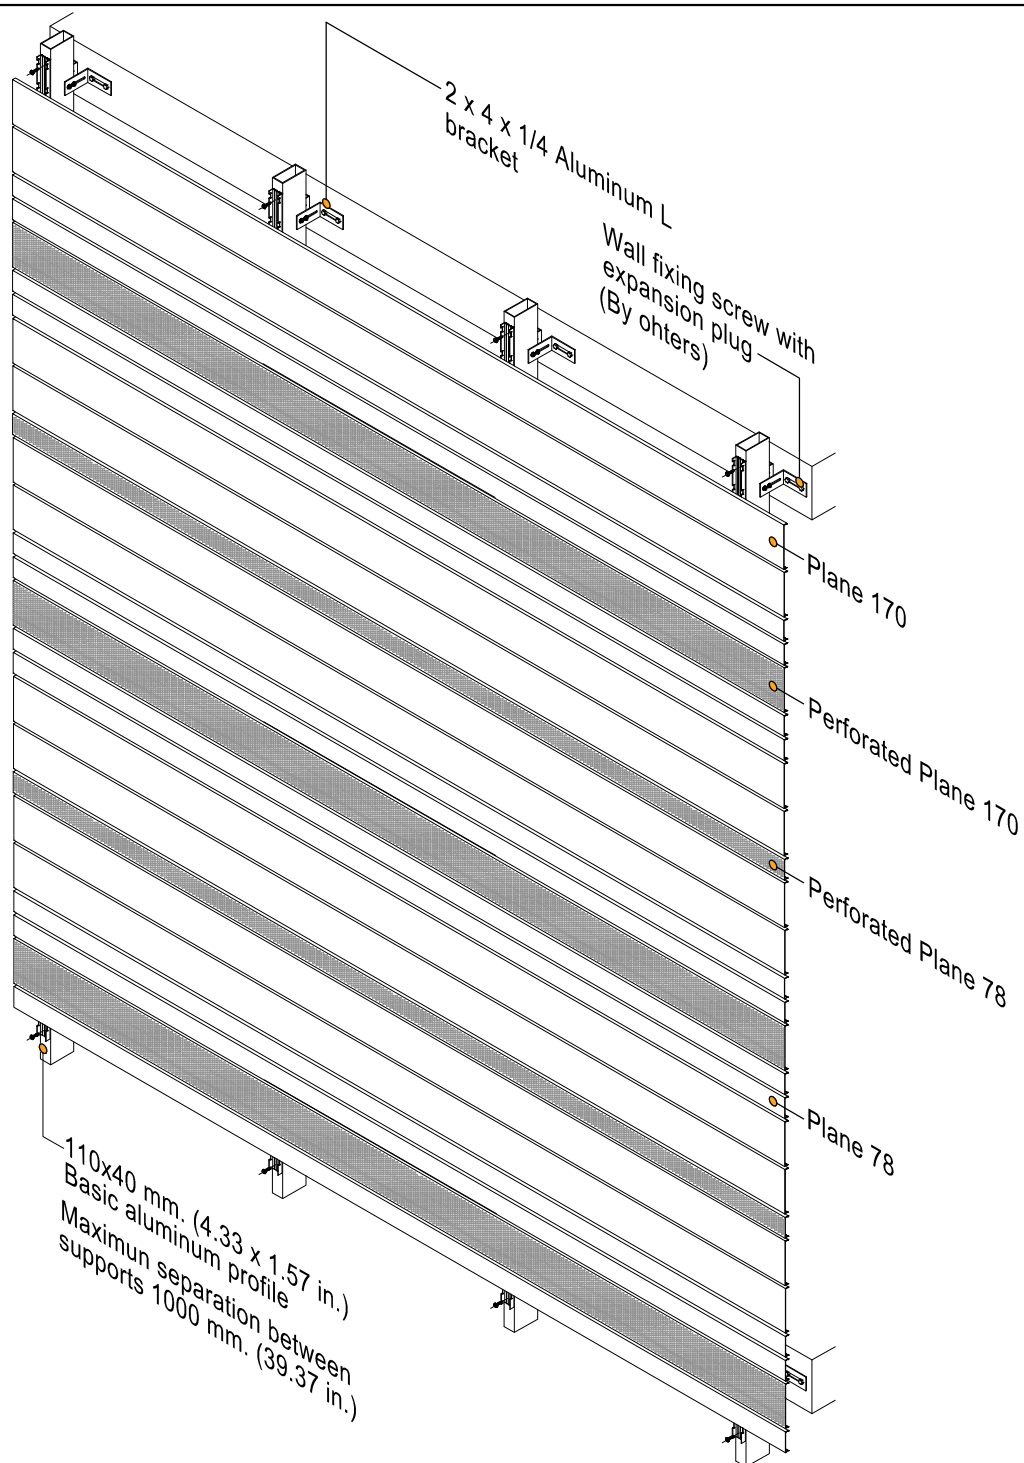

Technical department fácilfaçades®
Specification workshop

Project:
Location:
Authorization:

Revision:
Revision:
Date: September 2020
Dimensions: mm. (in.)

