
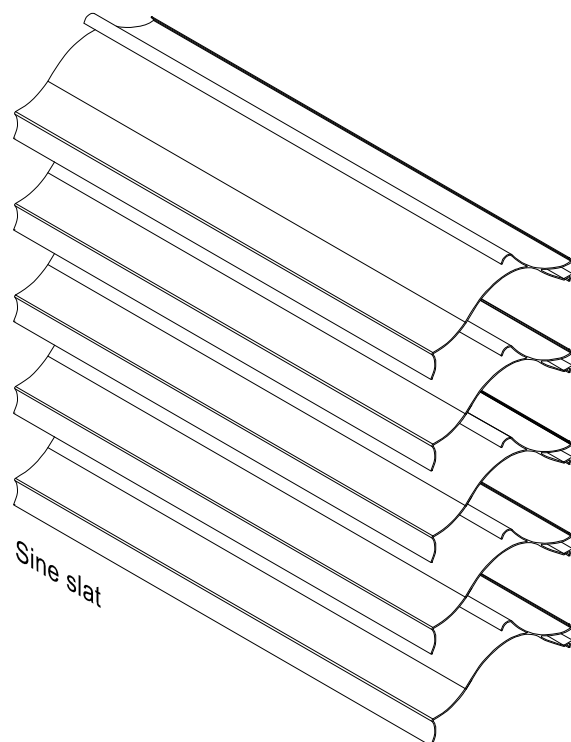


SINE

SNAP-ON SYSTEM

Page 01-07

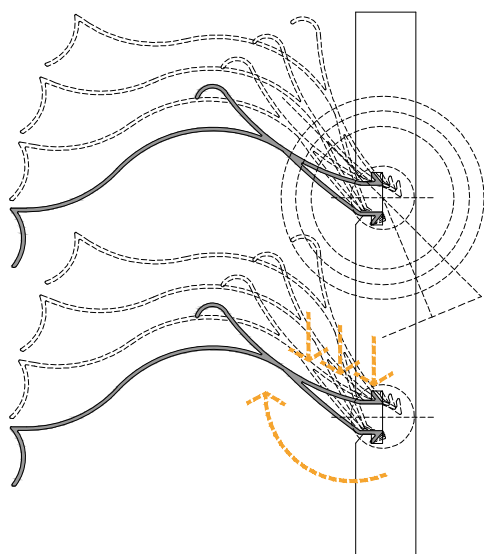


Technical department fácilfaçades®
Specification workshop

Project:
Location:
Authorization:

Revision:
Revision:

Date: September 2020
Dimensions: mm. (in.)



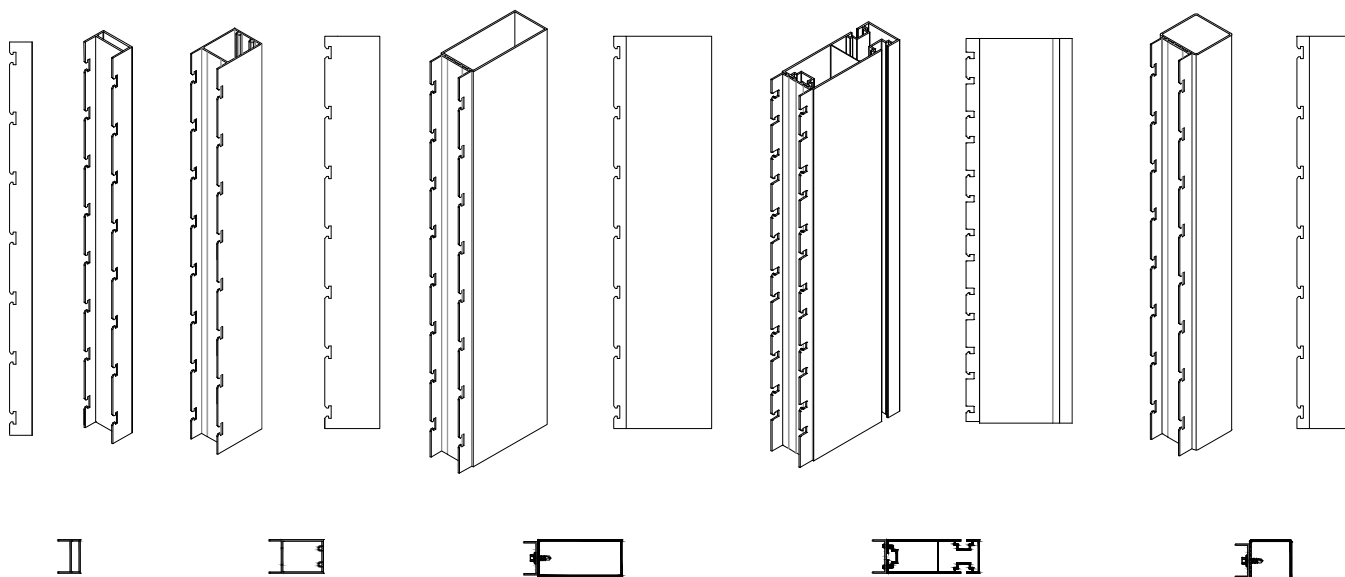

Option **A**
Die cut D1-D3

Option **B**
Die cut D1-D3

Option **C**
Die cut D1-D3

Option **D**
Die cut D1-D3



Option **E**
Die cut D1-D3

Distances for installation of structural supports

Nm Structural support options Maximum distance (DA) Maximum distance (DV)

A	Basic RM profile, wall covering	1300 mm. (51.18 in.)	1300 mm. (39.37 in.)
B	(T) support with die cut area 65X40 (2.55x1.57 in.)	2200 mm. (86.61 in.)	1300 mm.
C	Basic support with adapter profile 100X44 (3.93x1.73 in.)	3300 mm. (129.92 in.)	1300 mm.
D	Basic facade support with adapter profile 110X40 (4.33x1.57 in.)	4000 mm. (157.48 in.)	1300mm.
E	Adapter profile anchored to construction site	>3300 mm.	1300 mm.

- 1 Aluminium L bracket 4 x 4 x 1/4"
- 2 Aluminium L bracket 2 X 4 x 1/4"
- 3 Aluminium L bracket 2 X 2 x 1/4"

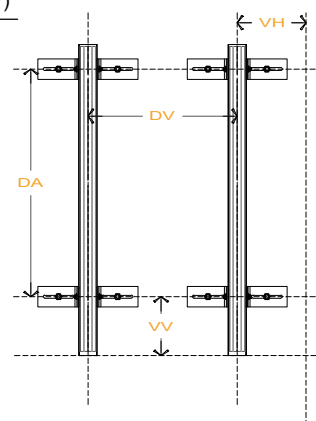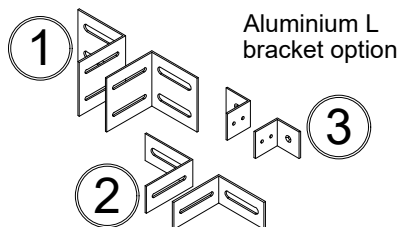

Nm Structural support options

DA Maximum distance between anchors of brackets

DV Maximum distance between structural supports

VV Maximum vertical cantilever (support) 500 mm. (19.65 in.)

VH Maximum horizontal cantilever (slat) 200 mm. (7.87 in.)

Technical department fácilfaçades®

Specification workshop

Project:

Location:

Authorization:

Revision:

Revision:


Date: September 2020

Dimensions: mm. (in.)


SINE

SPECIFICATION PARAMETERS AND TEST


Page 03-06

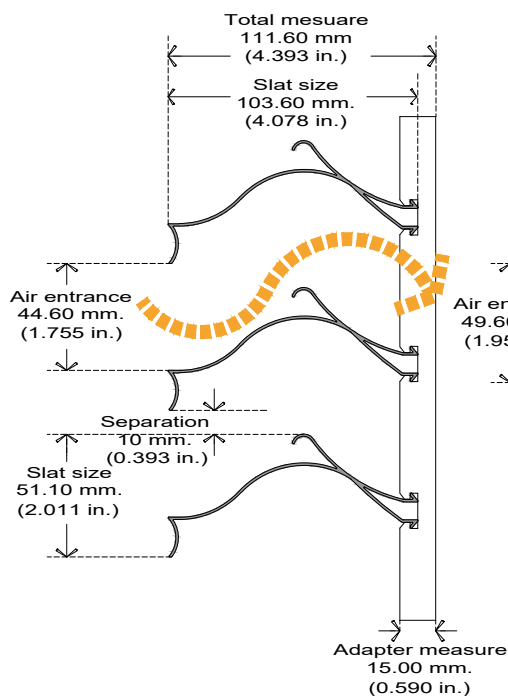

SPM 17

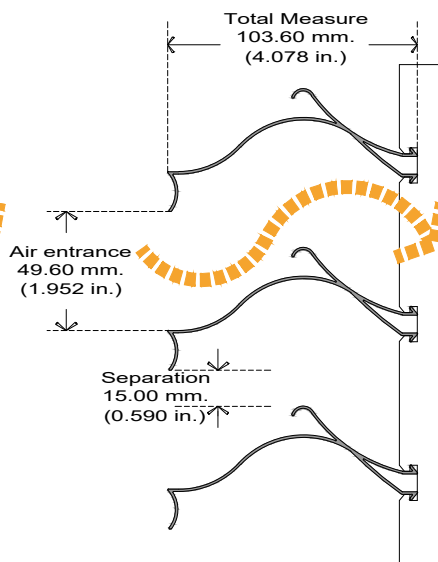

SPM 15

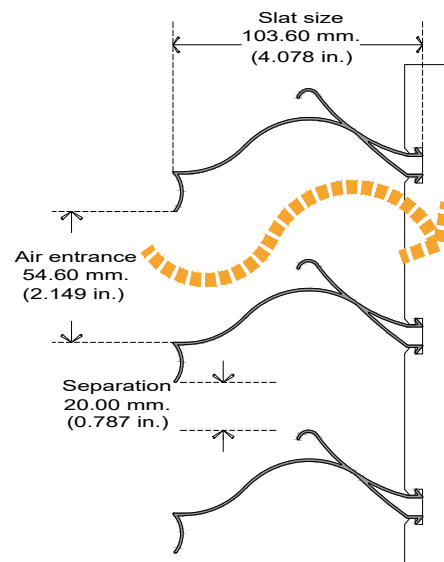

SPM 14

Number of slats per meter (SPM)

17.00 15.00 14.00

Clearance between slats	10.00 mm. (0.393 in.)	15.00 mm. (0.590 in.)	20.00 mm. (0.787 in.)
Free area (%)	71.36%	69.44%	70.98%
Wind load resistance	>249 k/h (5455 Pa)		Category 5
Water infiltration (%)	0.75%	N.T	N.T
Air pressure drop (K value)	47.47	N.T	N.T
Thermal resistance (R value) M2°C/W	N.T	N.T	N.T
Thermal transmittance (U value) W/m2°C	N.T	N.T	N.T
Emittance according to ASTM C 1371 / Clear anodized an raw aluminium	0.645		
Reflectance according to ASTM C 1549 / Clear anodized and raw aluminium	0.759		
Accelerated aging to ASTM G151 / Clear anodized an raw aluminium	0.000		

Extruded aluminium alloy 6063, tempering T5, post-consumption content 51.60%, pre-consumption content 13.70% Snap-on anchored slats to vertical supports, without screws to avoid risk of oxidation

*N.T: Test not performed



The results of the tests or calculations contemplated in this technical sheet, have the recognition of the Valor AMEVEC program, endorsed by the Asociación Mexicana de Ventanas y Cerramientos A.C. You can scan the QR code to verify its integrity and validity.

Technical department fácilfaçades®
Specification workshop

Revision:
Revision:

Project:

Location:

Authorization:

Date: September 2020


Dimensions: mm. (in.)



SINE

ANCHORING TO SLABS WITH STRUCTURAL SUPPORT 100 X 44 mm. (3.93X1.73 in.)

Page 04-07

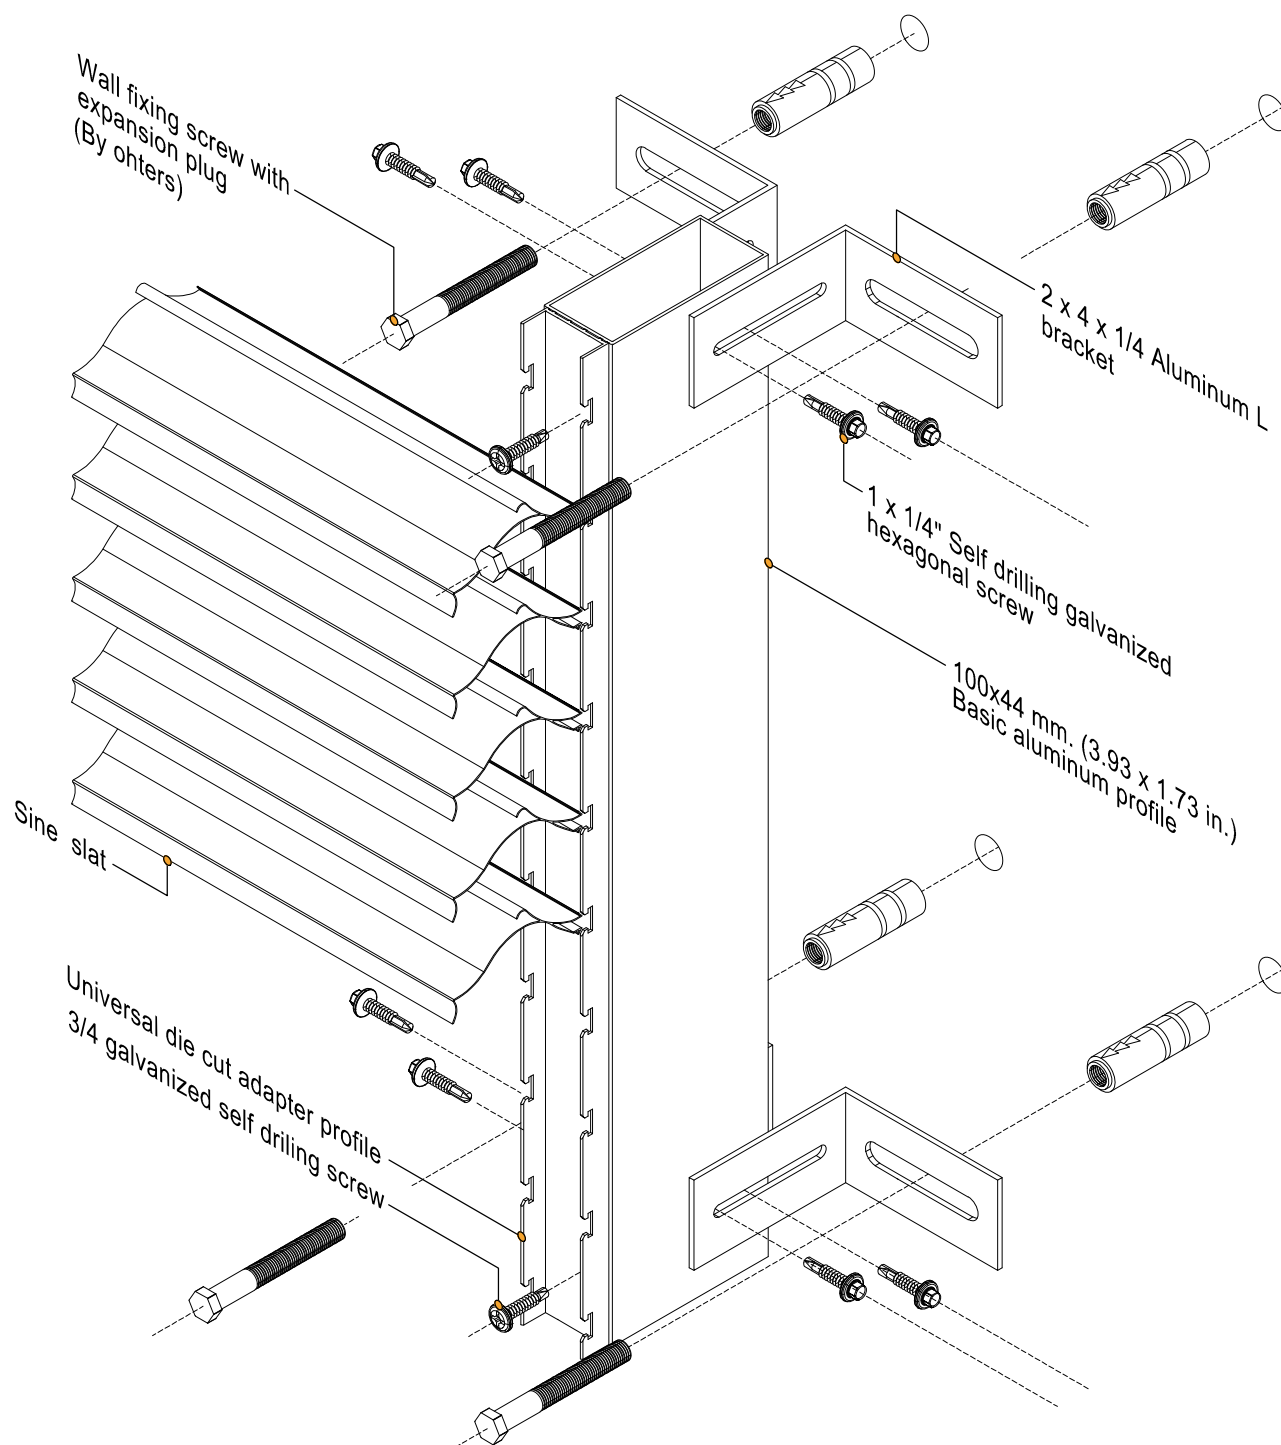

Technical department fácilfaçades®
Specification workshop

Project:
Location:
Authorization:

Revision:
Revision:


Date: September 2020
Dimensions: mm. (in.)

fácil
façades

SINE

ACHORING TO SLABS WITH STRUCTURAL SUPPORT 110 X 40 mm. (4.33X1.57 in.)

Page 05-07

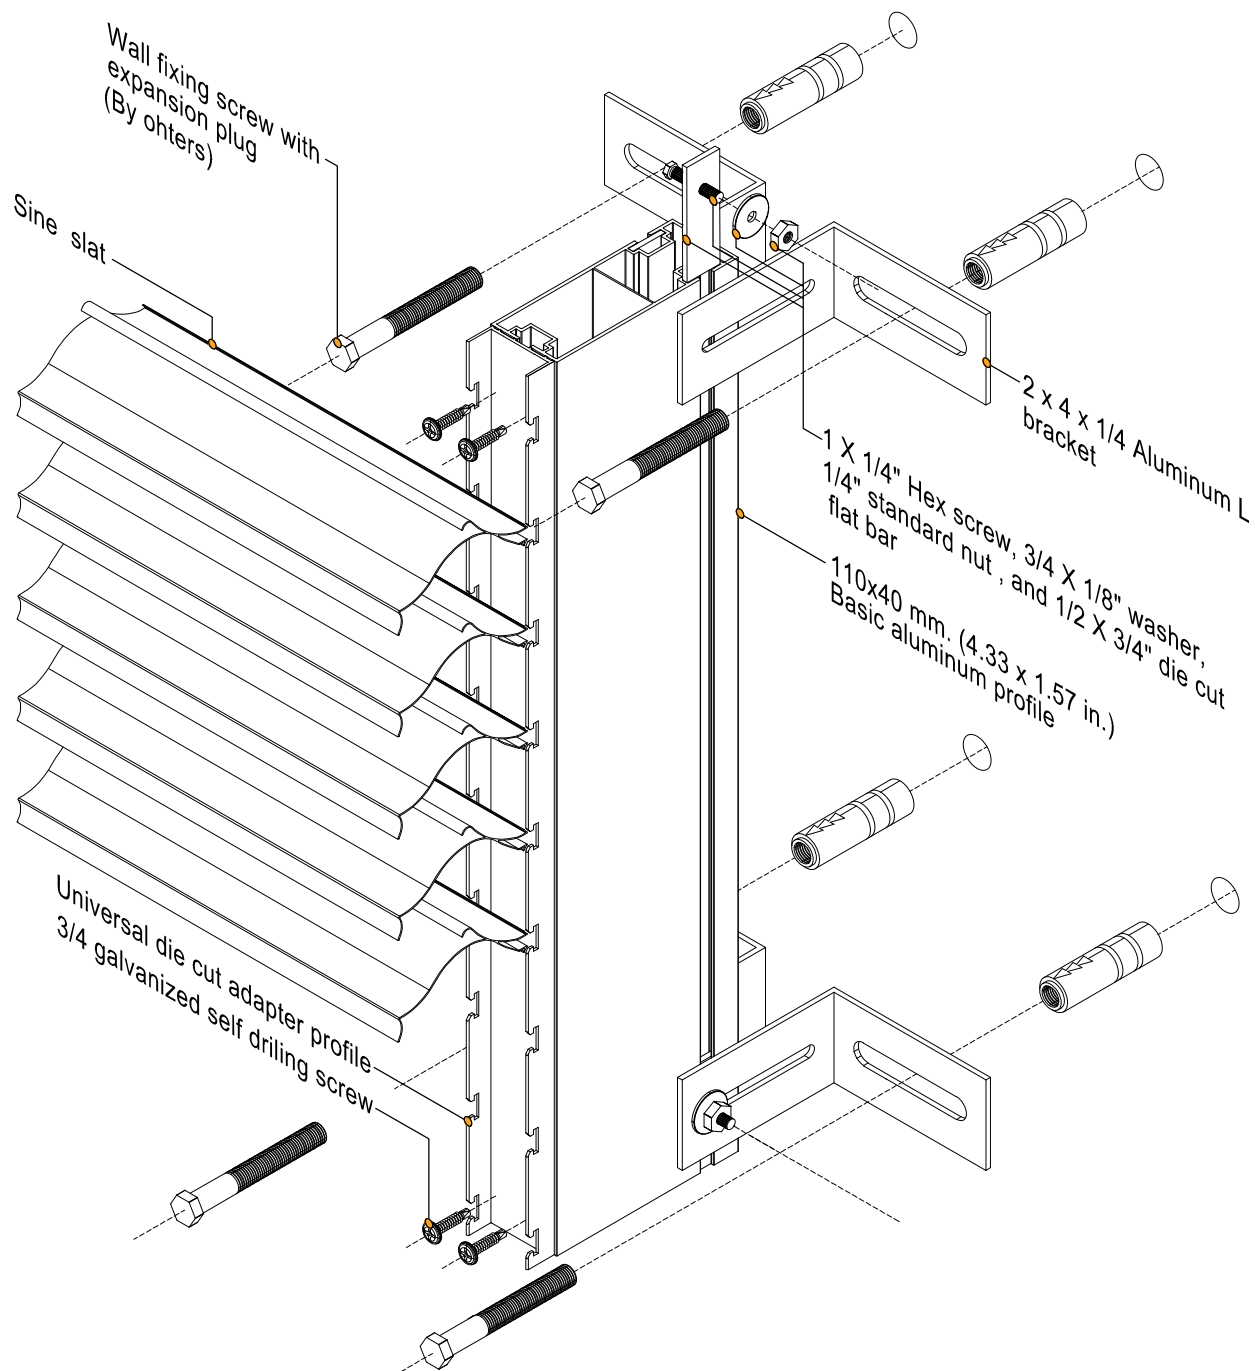

Technical department fácilfaçades®

Specification workshop

Project:

Location:

Authorization:

Revision:

Revision:

Date: September 2020


Dimensions: mm. (in.)



SINE

ANCHORAGE TO SUB STRUCTURE WITH STRUCTURAL SUPPORT
(T) 65 X 40 mm. (2.55 X 1.57 in.)

Page 06-07

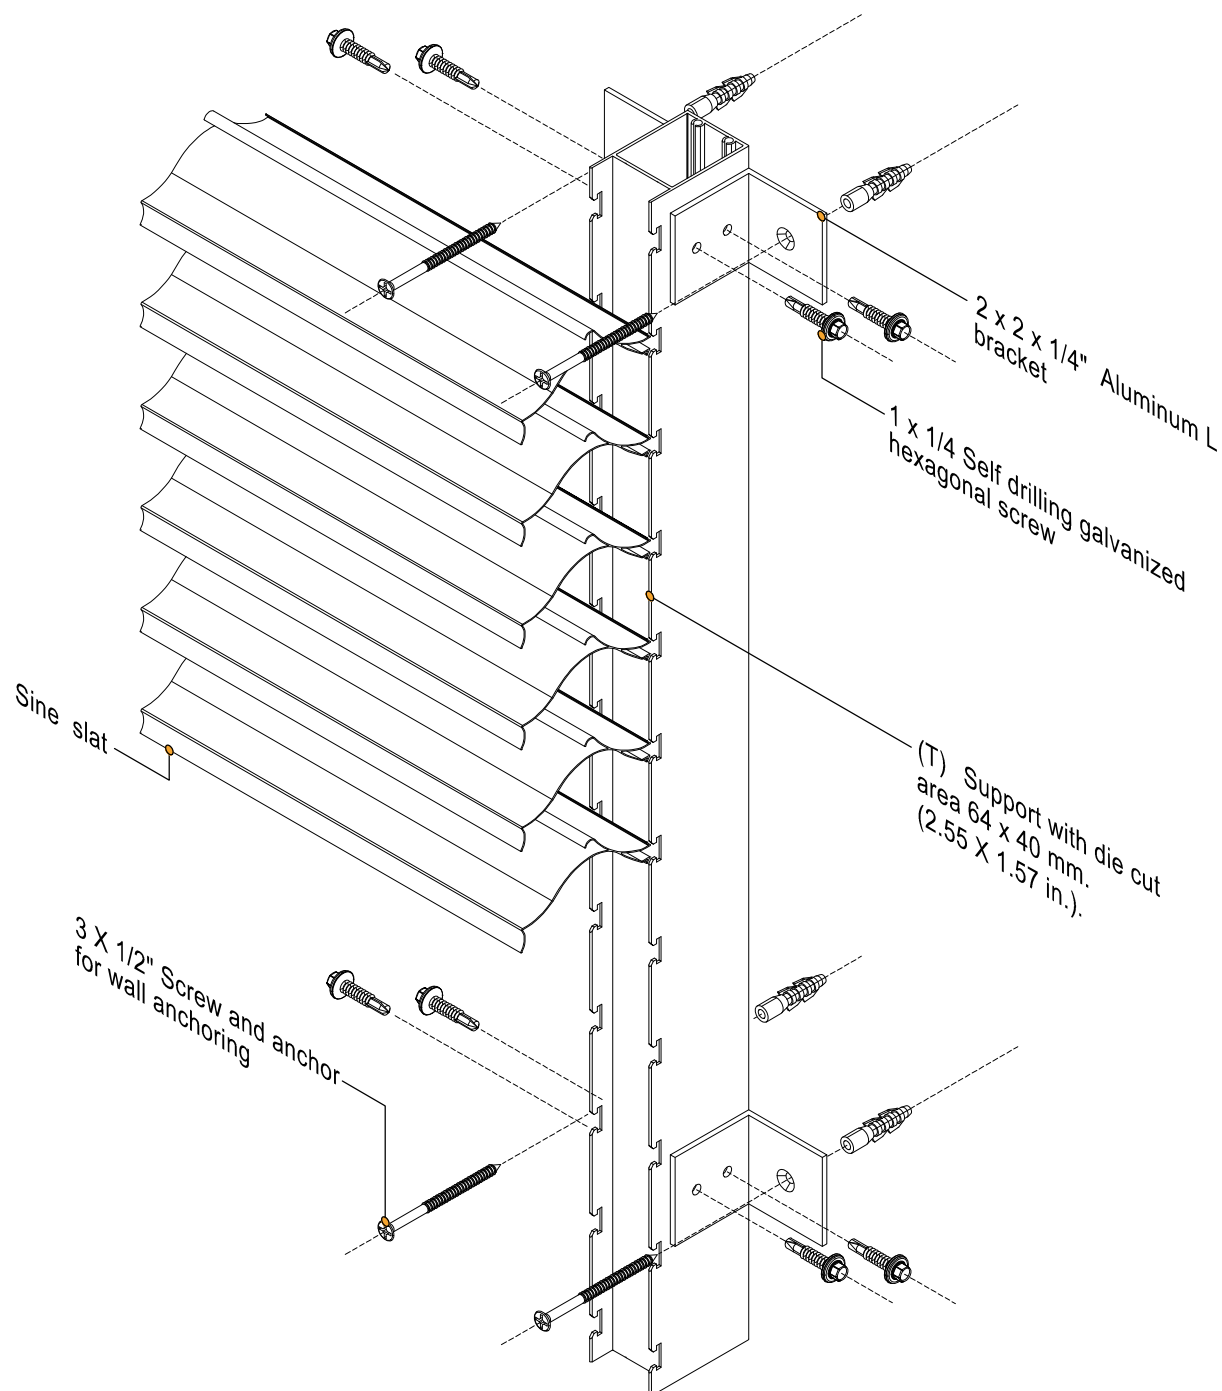

Technical department fácilfaçades®
Specification workshop

Project:
Location:
Authorization:

Revision:
Revision:


Date: September 2020
Dimensions: mm. (in.)

fácil
façades

SINE

DYNAMIC VENTILATED FACADE PROPOSAL

Page 07-07

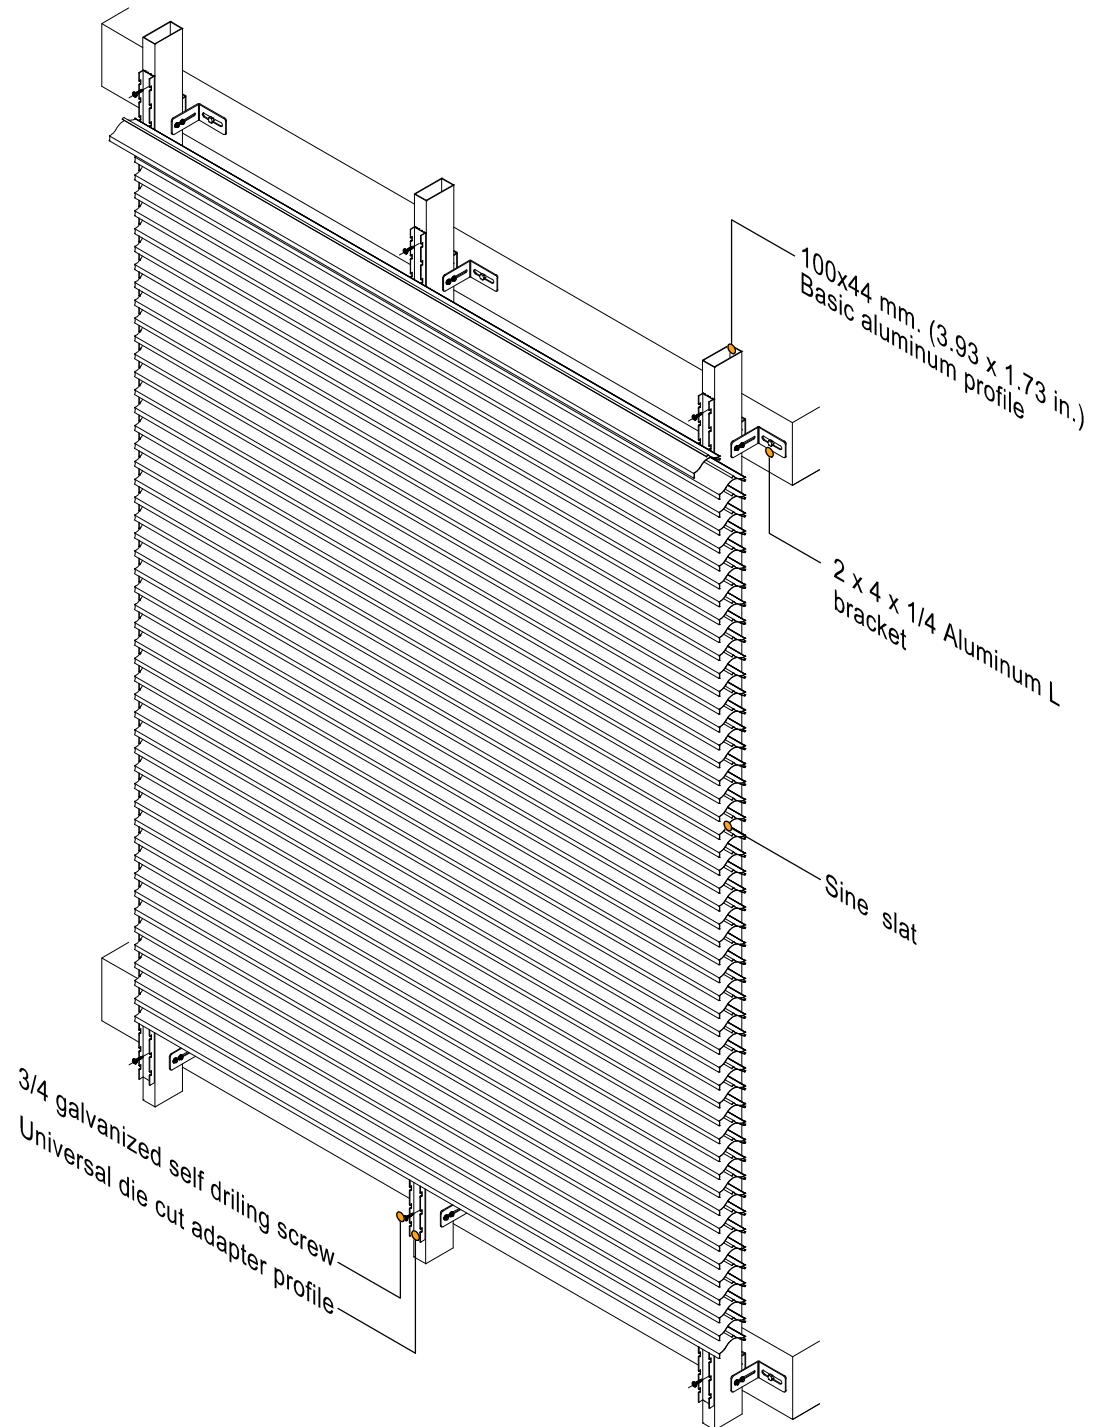

Technical department fácilfaçades®
Specification workshop

Project:
Location:
Authorization:

Revision:
Revision:
Date: September 2020
Dimensions: mm. (in.)

