
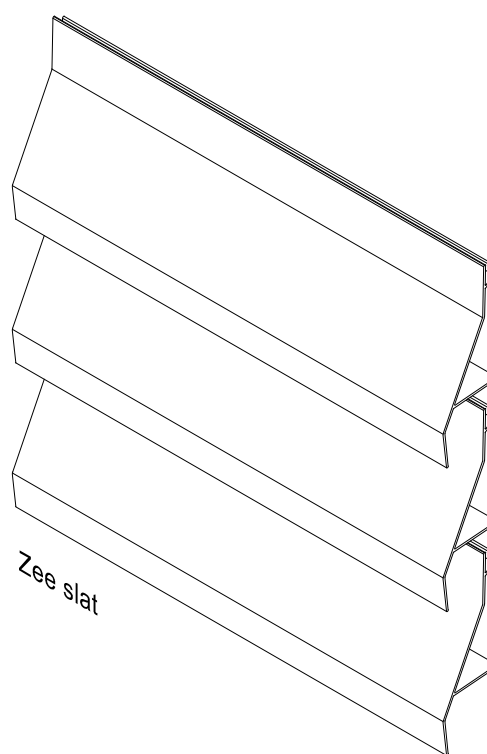


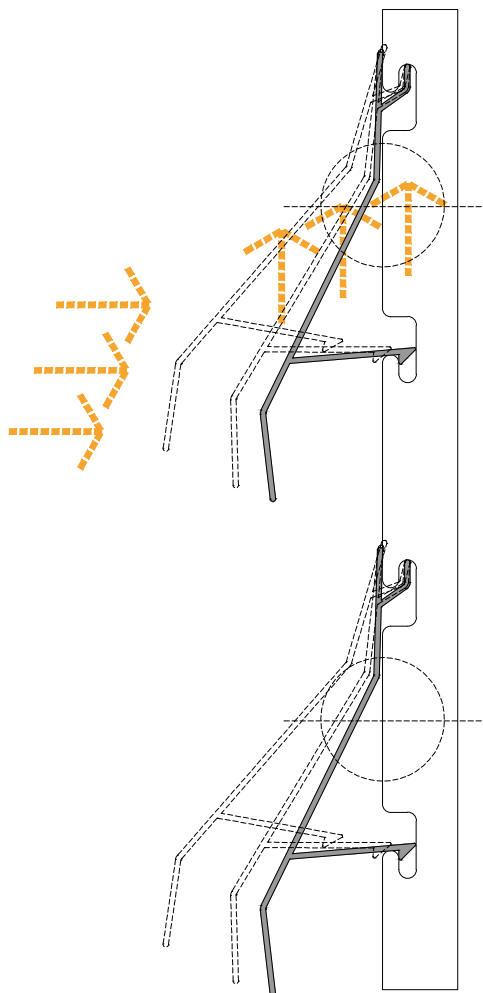


Technical department fácilfaçades®
Specification workshop

Project:
Location:
Authorization:

Revision:
Revision:

Date: August 2020
Dimensions: mm. (in.)

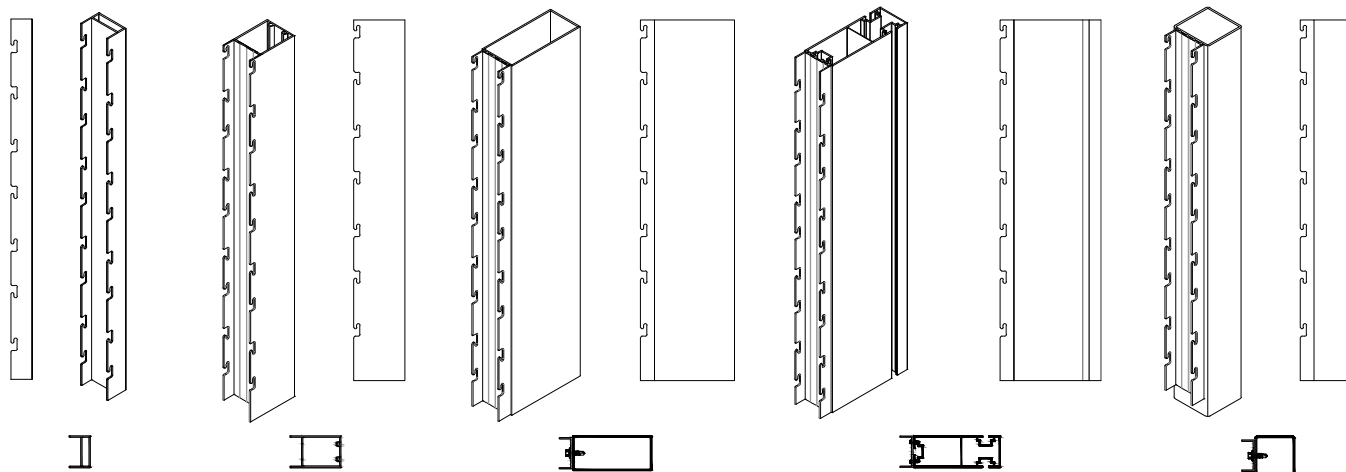



- Option **A** Die cut A1-A4
- Option **B** Die cut A1-A4
- Option **C** Die cut A1-A4
- Option **D** Die cut A1-A4
- Option **E** Die cut A1-A4

Distances for installation of structural supports

Nm	Structural support options	Maximum distance (DA)	Maximum distance (DV)
A	Basic RM profile, wall covering	1300 mm. (51.18 in.)	1000 mm. (39.37 in.)
B	(T) support with die cut area 65X40 (2.55x1.57 in.)	2200 mm. (86.61 in.)	1000 mm.
C	Basic support with adapter profile 100X44 (3.93x1.73 in.)	3300 mm. (129.92 in.)	1000 mm.
D	Basic facade support with adapter profile 110X40 (4.33x1.57 in.)	4000 mm. (157.48 in.)	1000 mm.
E	Adapter profile anchored to construction site	>4000 mm.	1000 mm.

- 1 Aluminium L bracket 4 x 4 x 1/4"
- 2 Aluminium L bracket 2 X 4 x 1/4"
- 3 Aluminium L bracket 2 X 2 x 1/4"

- Nm Structural support options
- DA Maximum distance between anchors of brackets
- DV Maximum distance between structural supports
- VV Maximum vertical cantilever (support) 500 mm. (19.65 in.)
- VH Maximum horizontal cantilever (slat) 200 mm. (7.87 in.)

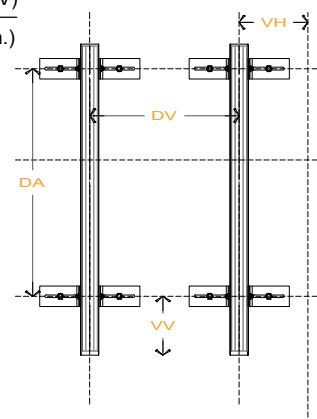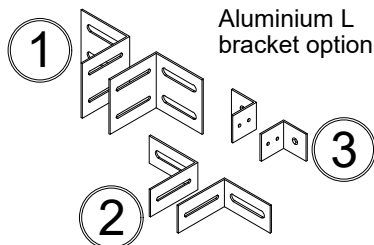


Technical department fácilfaçades®
Specification workshop


Revision:
Revision:

Project:
Location:
Authorization:


Date: August 2020
Dimensions: mm. (in.)

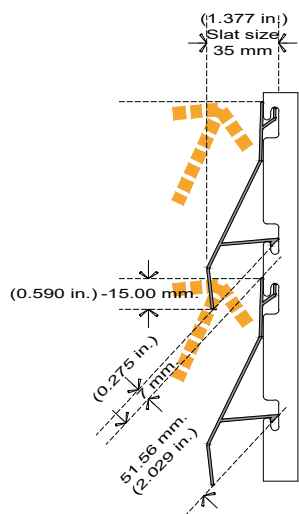


SPM 11.7

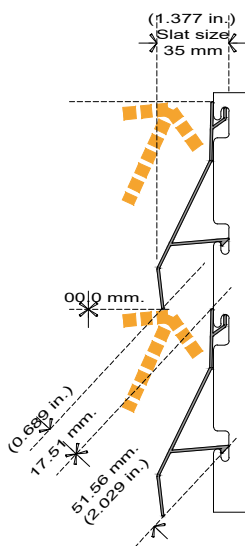

SPM 10

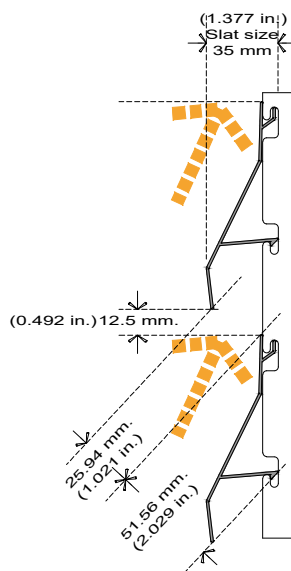

SPM 9

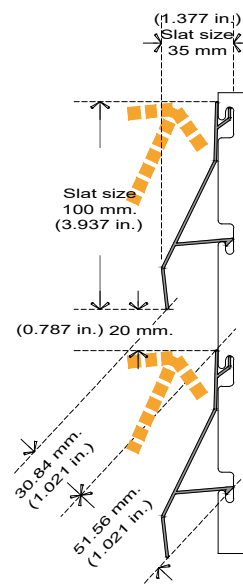

SPM 8.5

Number of slats per meter (SPM)

	11.76	10.00	9.00	8.50
Clearance between slats	(-)15.00 mm. (0.590 in.)	0.00 mm.	12.50 mm. (0.039 in.)	20.00 mm. (0.787 in.)
Free area (%)	24.66%	25.34%	33.46%	37.42%
Wind load resistance	>249 k/h (5455 Pa)		Category 5	
Water infiltration (%)	N.T	1.48%	N.T	N.T
Air pressure drop (K value)	N.T	N.T	N.T	N.T
Thermal resistance (R value)	N.T	N.T	N.T	N.T
Thermal transmittance (U value)	N.T	N.T	N.T	N.T
Emittance according to ASTM C 1371 / Clear anodized an raw aluminium			0.645	
Reflectance according to ASTM C 1549 / Clear anodized and raw aluminium			0.759	
Accelerated aging to ASTM G151 / Clear anodized an raw aluminium			0.000	

Extruded aluminium alloy 6063, tempering T5, post-consumption content 51.60%, pre-consumption content 13.70% Snap-on anchored slats to vertical supports, without screws to avoid risk of oxidation

*N.T: Test not performed



The results of the tests or calculations contemplated in this technical sheet, have the recognition of the Valor AMEVEC program, endorsed by the Asociación Mexicana de Ventanas y Cerramientos A.C. You can scan the QR code to verify its integrity and validity.


Technical department fácilfaçades®
Specification workshop

Revision:
Revision:

Project:
Location:
Authorization:

Date: August 2020
Dimensions: mm. (in.)



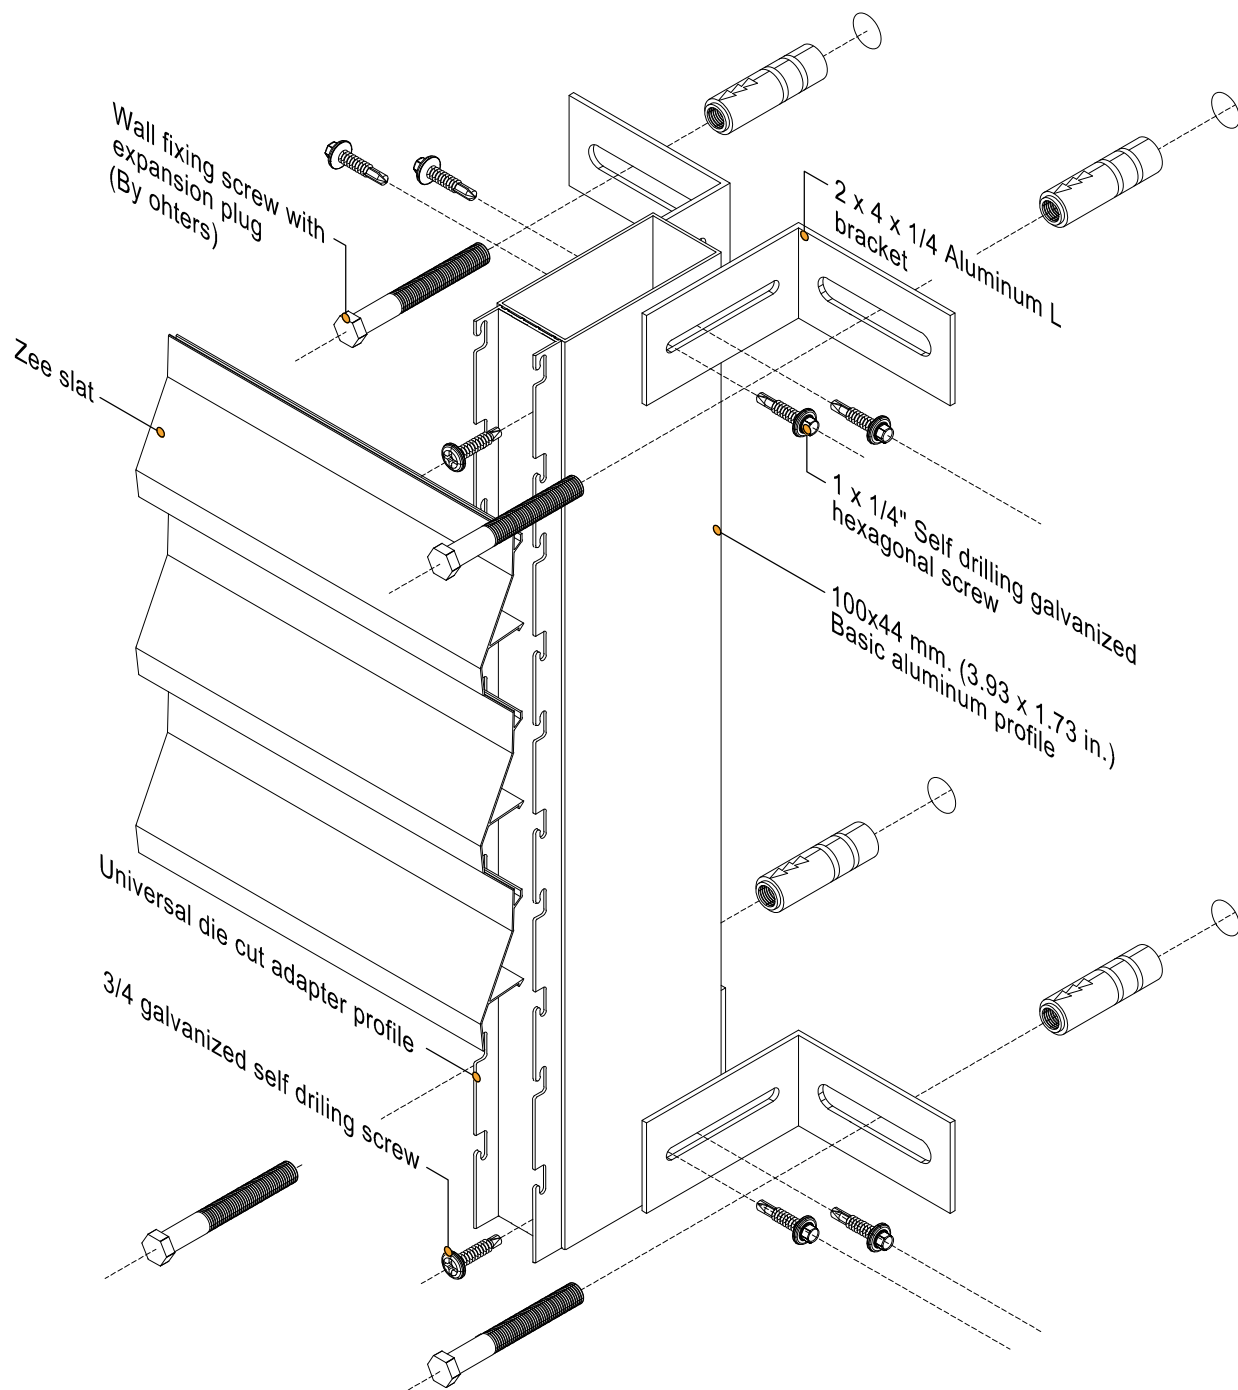


Technical department fácilfaçades®
Specification workshop

Project:
Location:
Authorization:

Revision:
Revision:

Date: August 2020
Dimensions: mm. (in.)

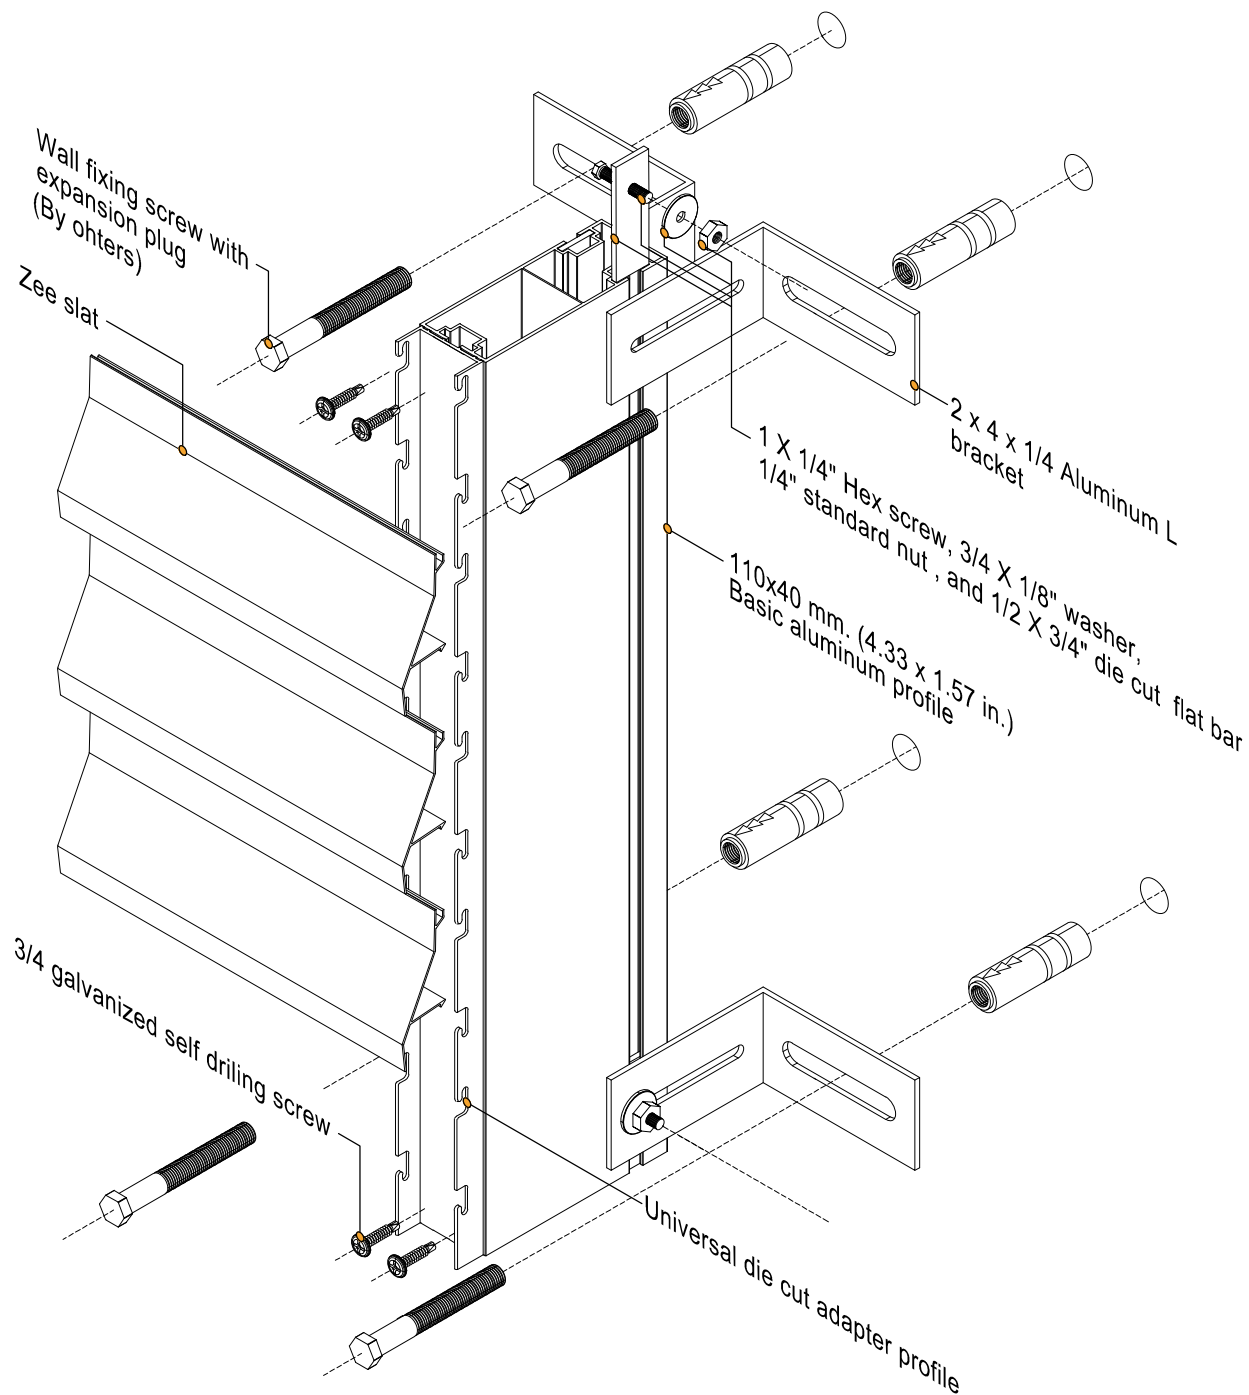


Technical department fácilfaçades®
Specification workshop

Project:
Location:
Authorization:

Revision:
Revision:

Date: August 2020
Dimensions: mm. (in.)

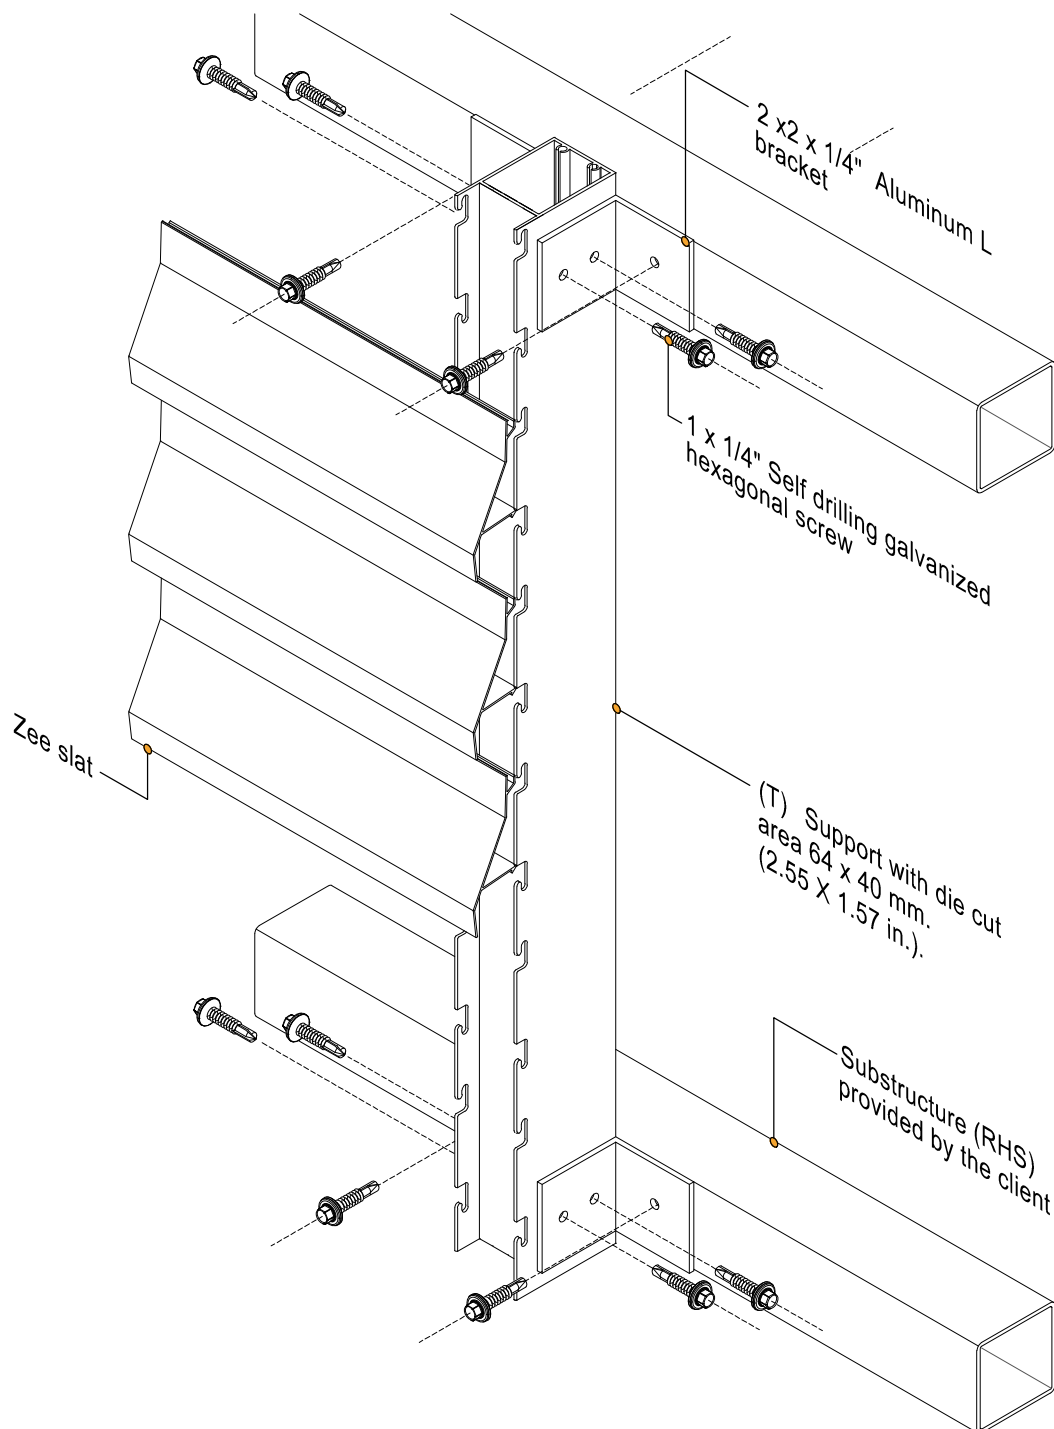


Technical department fácilfaçades®
Specification workshop

Project:
Location:
Authorization:

Revision:
Revision:

Date: August 2020
Dimensions: mm. (in.)

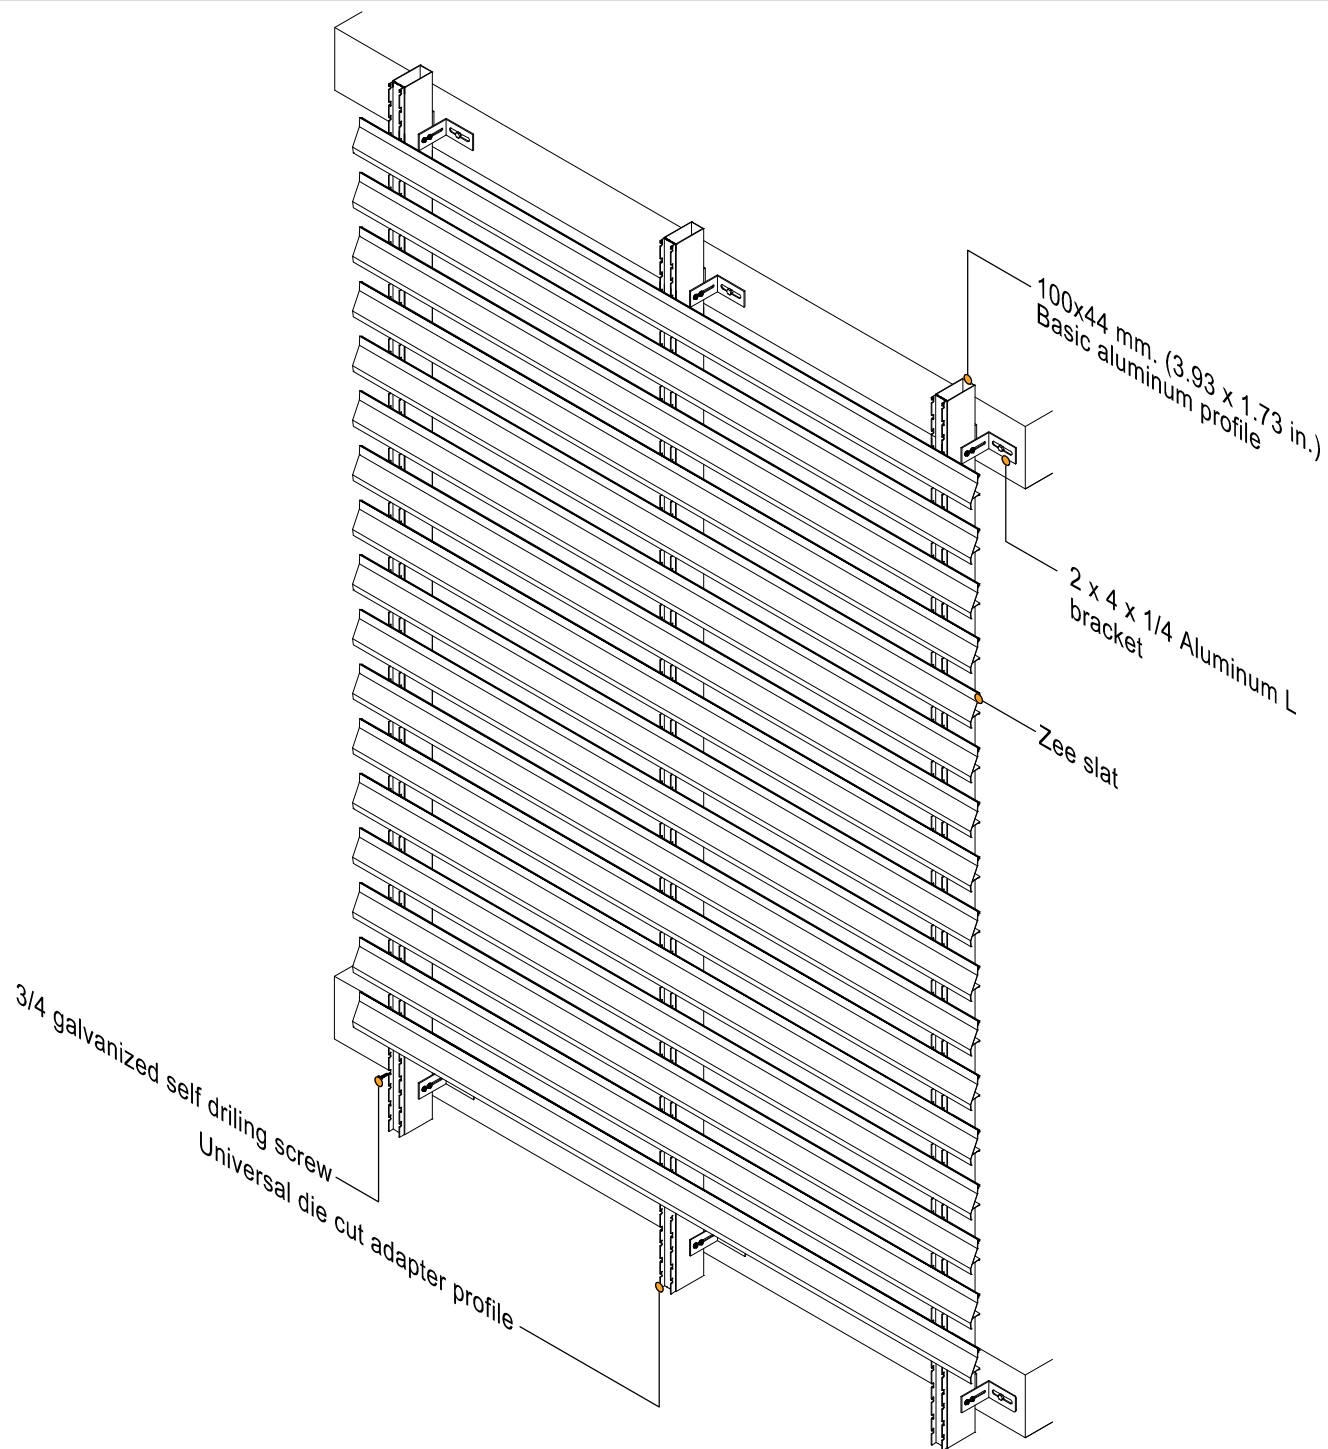

Technical department fácilfaçades®
Specification workshop

Project:
Location:
Authorization:

Revision:
Revision:

Date: August 2020
Dimensions: mm. (in.)